## **Pressure Gauges**

63 mm Diameter

Heavy duty glycerine filled pressure gauges with hermetically sealed brass case to prevent leakage and condensation. Gauges are glycerine filled for longer life and good dampening on pulsating pressures which occur in hydraulic Systems.

The case also incorporates a safety blow-out plug which relieves in the event of accidental overload. Gauges have dual scale bar and psi to BSEN 837.1. Accuracy  $\pm 1.6\%$  of full scale at 20 °C.

## **WEBTEC**


Milwaukee, WI 53235, USA Tel: +1 (414) 769-6400 sales-us@webtec.com

St. Ives, Cambs. PE27 3LZ, UK
Tel: +44 (0) 1480 397 400
sales-uk@webtec.com

www.webtec.com

## **Features**

- 63 mm (2 1/2") Diameter
- Dual scales bar and psi
- Glycerine filled
- 1/4" BSPP connection
- Bottom or centre back connection

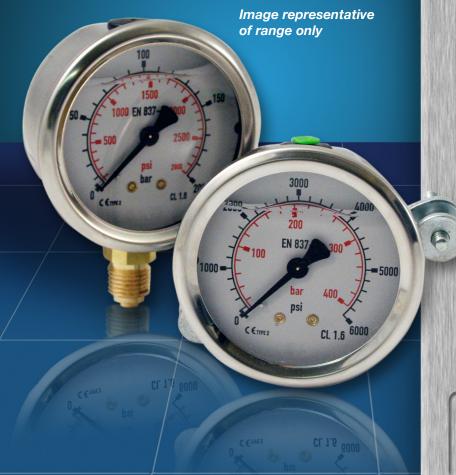

Hydraulic measurement and control

nqa.
ISO 9001
Registered
UKAS
018
Certificate No.8242

GAUGE-BU-ENG-0688.pdf

08/14